


REPRO-HANDBUCH PROCESS LENS MANUAL


Rodagon 1:5,6 f = 105 mm

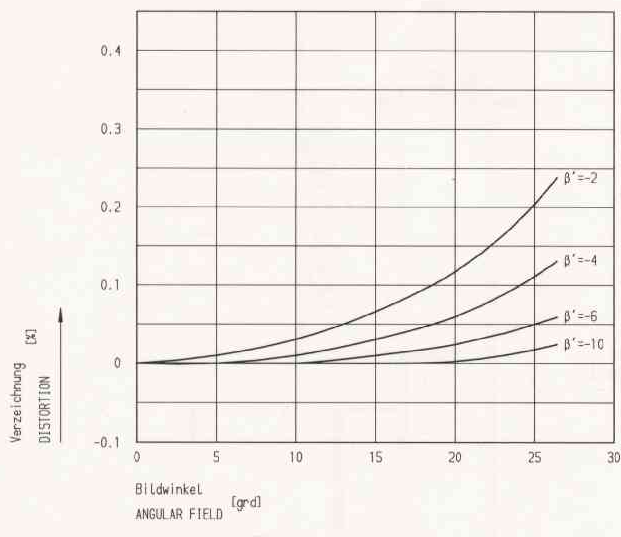

MTF (BEUG.OPT.) UEBER BILD FELD
MTF (DIFFRACT.) OVER IMAGE FIELD

AN 0
ON 7453 - 23
11.0/ 136.4

ED= -0.150 PA25(T) LAM 378.0 444.0 510.0 576.0 642.0
PERED= VLAM BEW 50.0 95.0 89.0 54.0 21.0 30.0 100.0 13.0 54.0
ORTSFREQUENZ: 18. 20. 40 1/MM
SPATIAL FREQ:
(X=BEUG.THEOR.WERT)
(X=DIFFR.LIM.VAL.)
XS= 0.00 BETA' = -0.167 BLENDENDURCHM= 7.70 BLENDENZ=1: 11.0
SCALE F-STOP DIAM. F-NUMB

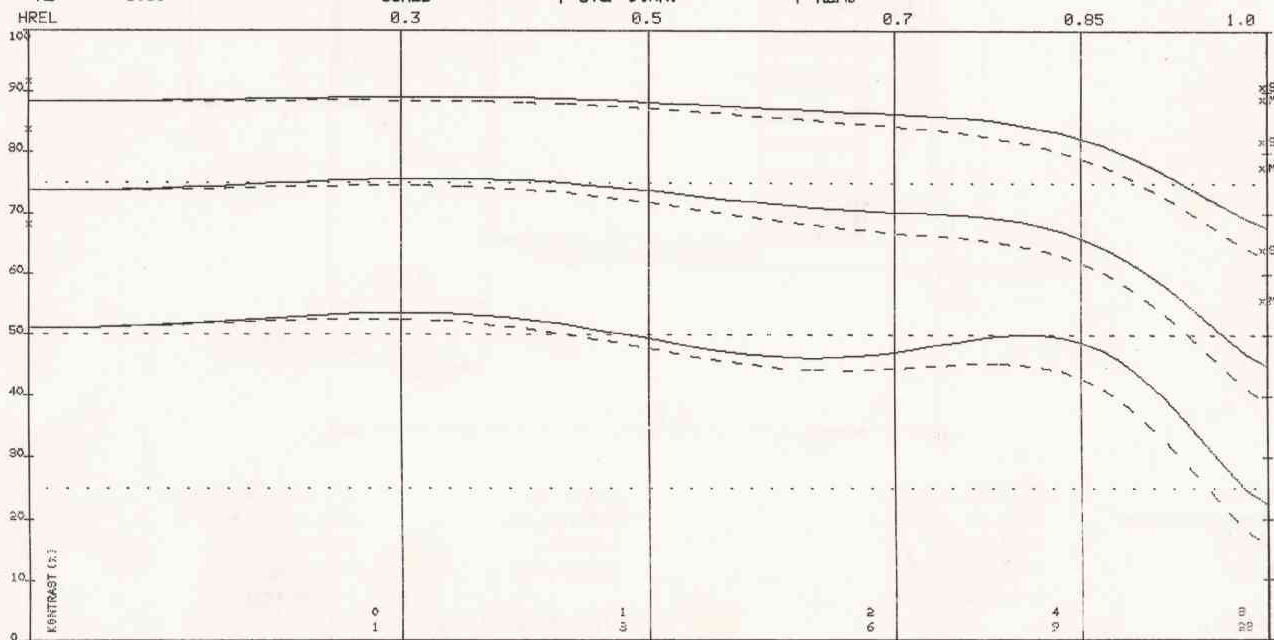

Y	Y'	WINKEL (GRAD)	HELLIGKEIT (X)	VERZ (0/00)	DATUM/DATE	Y'	WINKEL (GRAD)	HELLIGKEIT (X)	VERZ (0/00)	DATUM/DATE
0	0	0	96	0	24- 3-86	0	0	96	0	24- 3-86
1	18.14	0.3	96	-0.02		1	30.24	93	-0.07	
3	181.73	13.7	92	-0.21		6	254.42	89	-0.40	
6	42.33	22.5	85	-0.71		9	300.94	85	-0.71	
9	51.39	25.3	85	-0.71		28	363.46	85	-0.71	

OPT.WERKE G. RODENSTOCK MÜNCHEN