


REPRO-HANDBUCH PROCESS LENS MANUAL

Rodagon 1:5,6 f = 180 mm

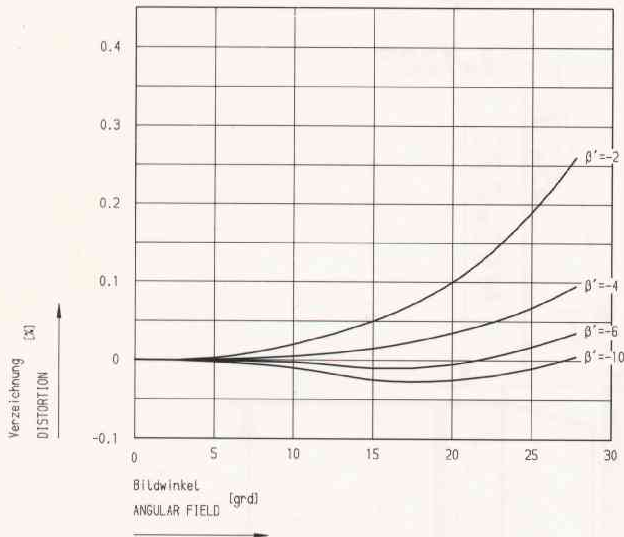

MTF (BEUG.OPT.) UEBER BILDFELD
MTF (DIFFRACT.) OVER IMAGE FIELD

AN 0

ON 7460 -1101

11.0/ 182.6

ED= -0.300 PA25(T) LAM 378.0 444.0 510.0 576.0 642.0
PERED= VLAM BEW 50.0 95.0 89.0 54.0 21.0 30.0 100.0 13.0 54.0
ORTSFREQUENZ: 10, 20, 40 1/MM
SPATIAL FREQ:
(X=BEUG.THEOR.WERT)
(X=DIFFR.LIM.VAL.)
XS= 0.00 BETA' = -0.200 BLENDENDURCHM= 13.23 BLENDENZ=1: 11.0
HREL 0.3 F-STOP DIAM. F-NUMB 0.7 0.85 1.0

