


REPRO-HANDBUCH PROCESS LENS MANUAL


Rodagon 1:5,6 f = 210 mm

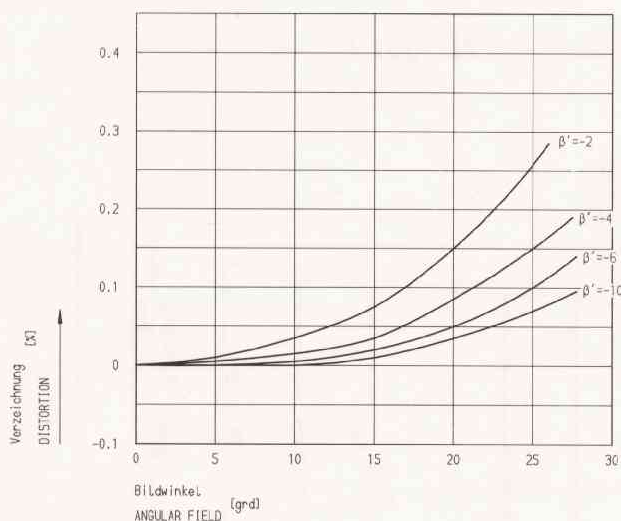

MTF (BEUG.OPT.) UEBER BILDFELD
MTF (DIFFRACT.) OVER IMAGE FIELD

AN 0
ON 7425 -6201
11.0/ 206.5

ED= -0.340 PA25(T) LAM 372.0 444.0 510.0 576.0 642.0
PERED= VLAM BEW 50.0 95.0 99.0 54.0 21.0 30.0 100.0 13.0 54.0
ORTSFREQUENZ: 10, 20, 40 1/111
SPATIAL FREQ:
(X=BEUG.THEOR.WERT)
(X=DIFFR.LIM.VAL.)
XS= 0.00 BETA' = -0.250 BLENDENDURCHM= 14.99 BLENDENZ=1: 11.0
SCALE F-STOP DIAM. F-NUMB

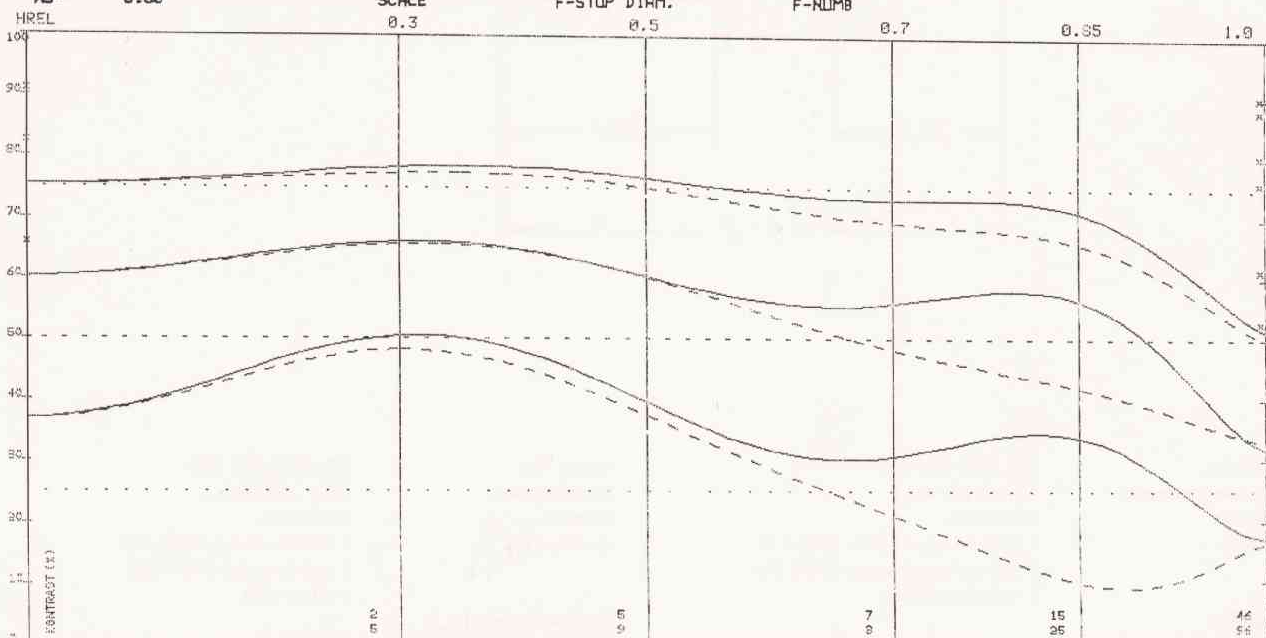

Y	Y'	WINKEL (GRAD)	HELLIGKEIT (X)	VERZ (0/00)	DATUM/DATE	Y	Y'	WINKEL (GRAD)	HELLIGKEIT (X)	VERZ (0/00)	DATUM/DATE
-151.00	-251.00	-352.52	-428.05	-503.59	24- 3-86	-151.00	-251.00	-352.52	-428.05	-503.59	24- 3-86
37.71	62.84	87.95	106.75	125.51		37.71	62.84	87.95	106.75	125.51	
8.3	13.7	18.8	22.5	26.0		8.3	13.7	18.8	22.5	26.0	
96	93	92	88	85		96	93	92	88	85	
-0.13	-0.34	-0.71	-1.15	-1.75		-0.13	-0.34	-0.71	-1.15	-1.75	

OPT. WERKE G. RODENSTOCK, MÜNCHEN