


REPRO-HANDBUCH PROCESS LENS MANUAL

Rodagon 1:4 f = 28 mm

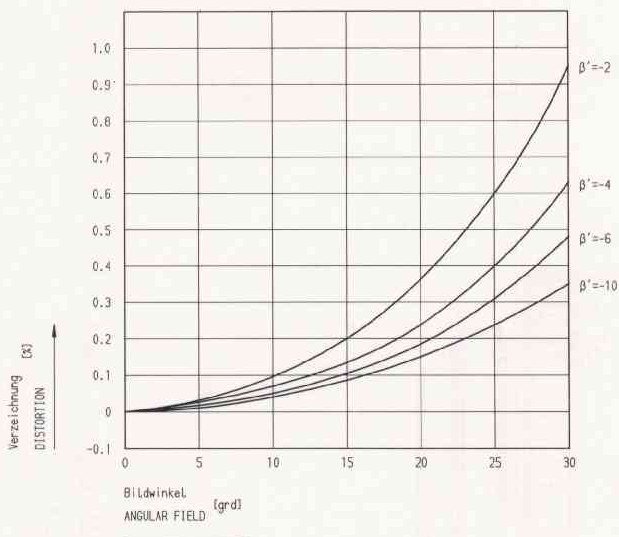

MTF (BEUG.OPT.) UEBER BILDFELD
MTF (DIFFRACT.) OVER IMAGE FIELD

AN 0
ON 7495 - 166
8.0/ 27.6

ED = -0.090 PA25(T) LAM 378.0 444.0 510.0 576.0 642.0
PERED = VLAM BEW 50.0 95.0 89.0 54.0 21.0 30.0 100.0 13.0 54.0
ORTSFREQUENZ: 10. 20. 40 1/MM
SPATIAL FREQ:
(X-BEUG. THEOR. WERT)
(X-DIFFR. LIM. VAL.)
XS = 0.00 BETA' = -0.050 BLENDENDURCHM = 2.55 BLENDENZ = 1: 0.0
SCALE F-STOP DIAM. F-NUMB

