


REPRO-HANDBUCH PROCESS LENS MANUAL

Rodagon 1:2,8 f = 50 mm

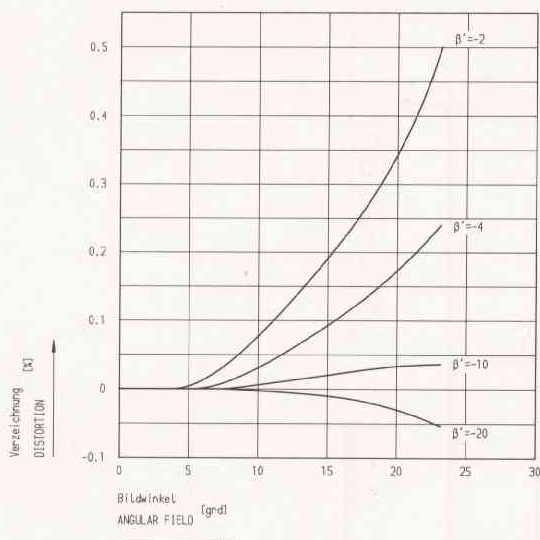

MTF (BEUG.OPT.) UEBER BILDFELD
MTF (DIFFRACT.) OVER IMAGE FIELD

ED= -0.118 PA25(T) LAM 378.0 444.0 510.0 576.0 642.0
PERED= VLAM BEW 50.0 95.0 89.0 54.0 21.0 30.0 100.0 13.0 54.0
ORTSFREQUENZ: 10. 20. 40 1/MM
SPATIAL FREQ:
(X=BEUG.THEOR.WERT)
(X=DIFFR.LIM.VAL.)
XS= 0.00 BETA' = -0.100 BLENDENDURCHM= 6.19 BLENDENZ=1: 5.6
SCALE F-STOP DIAM. F-NUMB

AN 0
ON 7509 -9001
5.6/ 50.2

