


REPRO-HANDBUCH PROCESS LENS MANUAL


Rodagon-WA 1:4 f = 40 mm

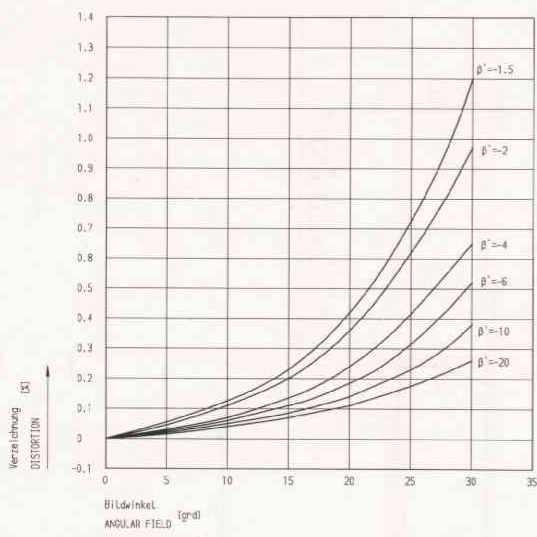

MTF (BEUG.OPT.) UEBER BILDFELD
MTF (DIFFRACT.) OVER IMAGE FIELD

AN 0
ON 7411 - 6
8.0/ 40.5

ED= -0.085 PA25(T) LAM 378.0 444.0 510.0 576.0 642.0
PERED= VLAM BEW 50.0 95.0 89.0 54.0 21.0 30.0 100.0 13.0 54.0
ORTSFREQUENZ: 10, 20, 40 1/MM
SPATIAL FREQ
(X=BEUG.THEOR.WERT)
(X=DIFFR.LIM.VAL.)
XS= 0.00 BETA' = -0.100 BLENDENDURCHM= 3.76 BLENDENZ=1: 8.0
HREL SCALE F-STOP DIAM. F-NUMB

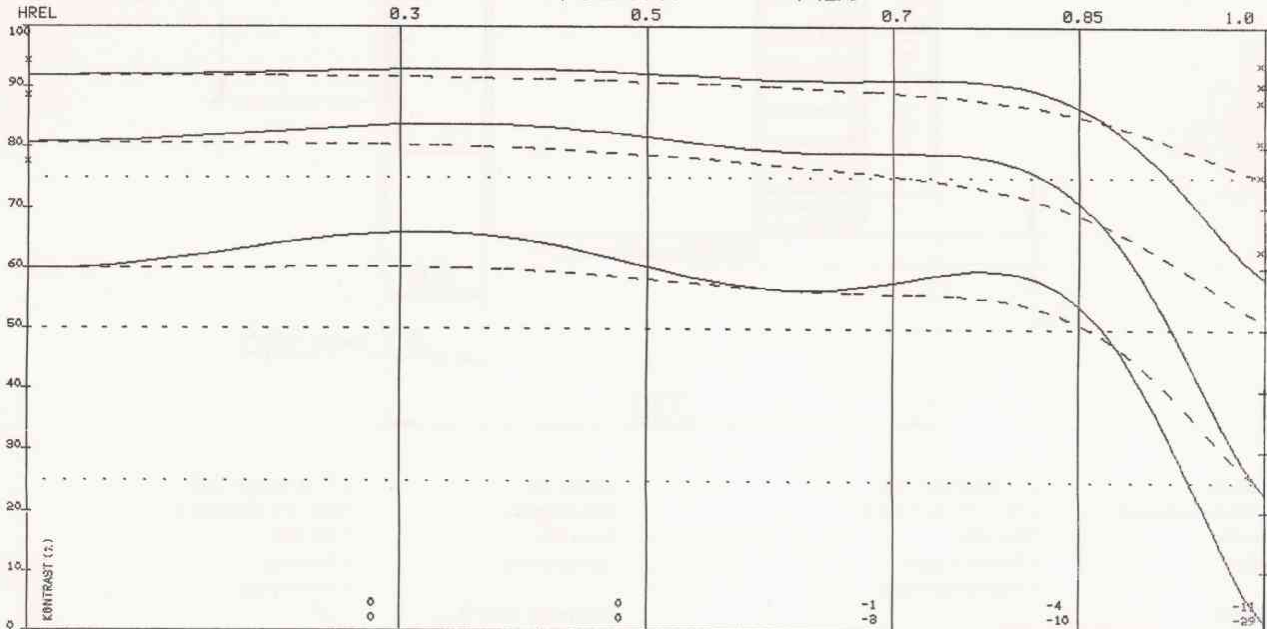

Y' = 0 (MITTE) Y' = 0 (AXIS) -77.17 -128.62 -180.07 -218.65 -257.24
WINKEL (GRAD) = 0 ANGLE (DEGR.) = 0 7.70 12.83 17.94 21.77 25.58
HELLIGKEIT (X) = 96 LIGHT-INT. (X) = 96 9.8 16.1 22.0 26.1 30.0
VERZ (0/00) = 0 DIST (0.1X) = 0 94 94 91 88 77
DATUM/DATE 29-11-85 -0.40 -0.99 -1.82 -2.60 -3.64
OPT.WERKE G.RODENSTOCK.MUENCHEN