


REPRO-HANDBUCH PROCESS LENS MANUAL

Rodagon-WA 1:4 f = 80 mm

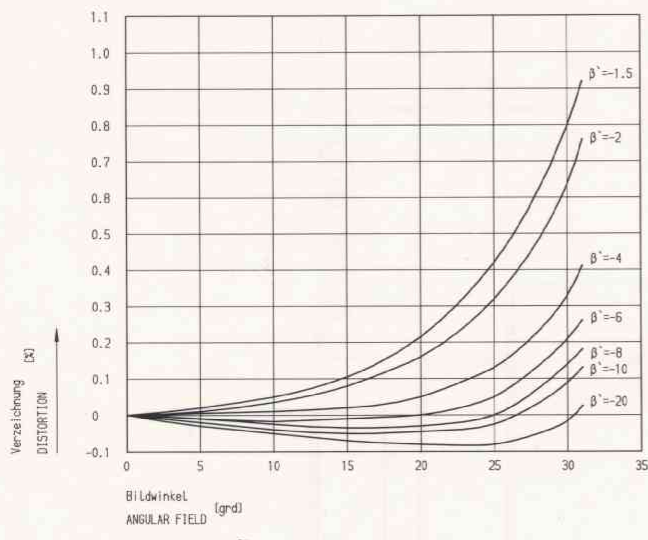

MTF (BEUG.OPT.) UEBER BILDFELD
MTF (DIFFRACT.) OVER IMAGE FIELD

AN 0
DN 7433 - 232
8.0/ 82.6

ED= -0.150 PA25(T) LAM 378.0 444.0 510.0 576.0 642.0
PERED= VLAM BEW 50.0 95.0 89.0 54.0 21.0 30.0 100.0 13.0 54.0
ORTSFREQUENZ: 10, 20, 40 1/MM
SPATIAL FREQ:
(X=BEUG.THEOR.WERT)
(X=DIFFR.LIM.VAL.)
XS= 0.00 BETA' = -0.125 BLENDENDURCHM= 7.66 BLENDENZ=1: 8.0
SCALE F-STOP DIAM. F-NUMB
0.3 0.5 0.7 0.85 1.0

